

Balancing Machine for Crankshafts

UHK 16-B1



Advantages

- Bearing pedestals guided in slots for easy changeover.
- Easy operating due to design innovation.
- Economic operating (monitor with correction data directly at the machine).
- Maintenance free and wearless vibration adapters.
- Teaching of the drill head position ensures exact drilling depths.
- Dry processing.
- Chip removal by suction mask and chip suction.
- High-quality German drill spindle.
- Tool management for 99 tools.
- Integrated statistics software.
- Automatic MFU.

Application

- Balancing of passenger car and truck crankshafts for 2 - 12 cylinder V-shafts with mounted bob weights.
- Manual operating and loading.
- Unbalance correction by drilling with one-spindle drill unit.

Description

- 1-station balancing machine with safety fence, access via operating door.
- Measuring system with frequency controlled drive and maintenance-free sensors. Bearing pedestals axially adjustable with hardened measuring rollers and axial start-up. Lifting device for assimilation of drill forces.
- Measuring drive by belt drive.
- Unbalance compensation by a drill spindle (mounted to gantry) with NC-infeed slide. The correction unit will be manually positioned to the correction planes (supported by a linelaser) and pneumatically clamped.
- Control cabinet with all electrical components.
- Operating via touchscreen monitor 19" (manual functions (WIN CC) and measuring unit operations (Windows®))
- Manual operating panel directly at drilling unit.




Drill unit with chip suction

Without obligation, subject to change without notice!



Measuring rollers and lifter

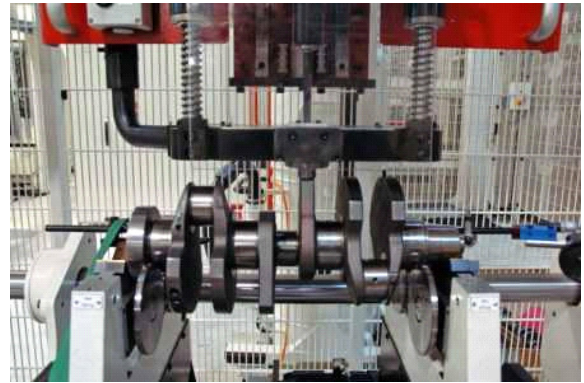

Linelaser at work piece

Technical Data

UHK 16-B1

Rotor:		
Weight	kg	5 - 115
Total length	mm	300 - 1200
Main bearing diameter	mm	40 - 100
Journal distance, min./max.	mm	90 / 1140
Rotor diameter, approx.	mm	450
Correction		Dry drilling
Correction radius	mm	60 - 225
Machine:		
Measuring planes		2
Measuring system		force measuring with maintenance-free sensors
Cycle time	min.	cycle time chart for each shaft will be supplied
Unbalance reduction ratio	%	95
Measuring drive		Belt drive
Machine data:		
Width x Depth x Height	mm	3600 x 3700 x 2800
Balancing speed	rpm	200 - 650
Measuring uncertainty ¹⁾	gmm/kg	1

¹⁾ depending on work piece

Options

- Loading and positioning for pin drive and slide with NC axis, achieved by either gantry or robot
- Tool monitoring (first-cut, abrasion and breakage)
- Shaft drive
- Pin drive
- Positioning of cross slide with NC-axis
- Complete housing made of steel plate

Scope of Supply

- Siemens or Indramat drive
- Casted machine bed
- Gantry at machine bed
- Infeed-slide with NC-axis
- Bearing pedestals with roller bearings
- Lifter for drilling
- Belt drive
- Suction device
- Separate control cabinet
- Monitor and manually operating panel at machine
- Siemens S7 control
- MC10 measuring electronic (Windows 2000® based software)
- Safety fence with operating panel
- Installation elements